

SB-5612

Fanless Embedded Box PC with 13th/12th Alder Lake-U Intel® Core™ i5 Processor



Applications

- Edge AI Computing
- Factory Automation
- Transportation Management
- Automation Machine

Features

- Intel® Core™ i5-1235U / i5-1245UE / i5-1335U / i5-1335UE Processor
- Dual Channel DDR4 3200MHz, up to 64GB
- Supports 16 x Isolated DI & 16 x Isolated DO
- Supports 1 x Removable 2.5" SATA HDD/SSD
- Supports 1 x Flexible I/O windows for Scalability
- -20°C ~ 70°C Wide Operating Temperature

Ordering Information

Part No.	Description
SB-5612-1A1	Intel® Core™ i5-1235U / i5-1245UE / i5-1335U / i5-1335UE CPU, 2 x 2.5GbE, 2 x HDMI, 4 x RS-232/422/485, 4 x USB3.2 Gen 2, 4 x USB2.0, 32-bit DIO, Line Out, Mic In, DC 9~36 VDC

Packing List

Description
1 x SB-5612-1A1


Optional Items

Part No.	Description
EA-PS-80W12VTB2xx-0111	Adaptor 80W/12V/6.7A_-30~70°C_TB2
27-x301010005-CA	Power Cord, 3-pin EU Type, 180 cm
27-x301000003-CA	Power Cord, 3-pin US Type, 180 cm
AWD-4G003	4G(LTE) EG25-G + 2 Antennas, Full Size (for Global)
AWD-WF009	Wi-Fi 802.11 a/b/g/n/ac/BT5.0 (2T2R) +2 Antennas (Dual Band), M.2 2230 Type

Specifications

Model		SB-5612-1A1	SB-5612-2A1
Processor System	CPU	Intel® Core™ i5-1235U/i5-1245UE CPU	Intel® Core™ i5-1335U / i5-1335UE CPU
	BIOS	UEFI	
	TPM	Onboard TPM 2.0	
Memory	Technology	Dual Channel DDR4 3200MHz	
	Max. Capacity	64GB	
	Type	2 x 260-pin SO-DIMM	
Display	Graphics Engine	Intel® Iris® X ^e Graphics	
	Multiple Display	2	
	HDMI	2 x HDMI, Max Resolution 4096 x 2160	
I/O Interface	USB	4 x USB3.2 Gen2 2 x USB2.0	
	Serial Port	4 x RS-232/422/485	
	Ethernet	2 x 2.5GbE (Intel® I226V)	
	Audio	1 x Line-out, 1 x Mic-in	
	DIO	16 x Isolated DI & 16 x Isolated DO (Optional)	
	GPIO	4 x Input, 4 x Output (D-SUB 9-pin)	
	Antenna Hole	7	
	Flexible I/O Window	1	
Storage	M.2	1 x M.2 M-Key2 2280 (PCIe x4 and SATA III)	
Expansion	Mini-PCIe	1 x Full-Size Mini-PCIe (PCIe, USB 2.0 and SIM)	
	M.2	1 x M.2 E-Key 2230 (PCIe, CNVi)	
	SIM Holder	1 x Micro-SIM Holder	
Power	Power Mode	AT/ATX	
	Power Supply Voltage	9-36V DC Input	
	Power Connector Type	1 x 2-pin Terminal Block Connector	
Mounting	Type	Wall Mount	
Environment	Operating Temperature	-20 ~60°C	
	Storage Temperature	-40 ~ 85°C	
	Humidity	0% ~ 90% (non-condensing)	
General	Vibration	1Grms, 5-500 Hz, 1hr/Axis	
	Shock	20Grms, Half-sine 11ms	
	Certification	CE/FCC Class A	
	Thermal Dissipation	Fanless system	
	Material	Aluminum & SECC	
	Dimensions (W x D x H)	248.5 x 228 x 100mm	
	Net Weight	5.0kg	
	Operating System	Windows 10 IoT, Windwos 11 (IoT/Professional), Linux	

Dimensions SB-5612-1A1

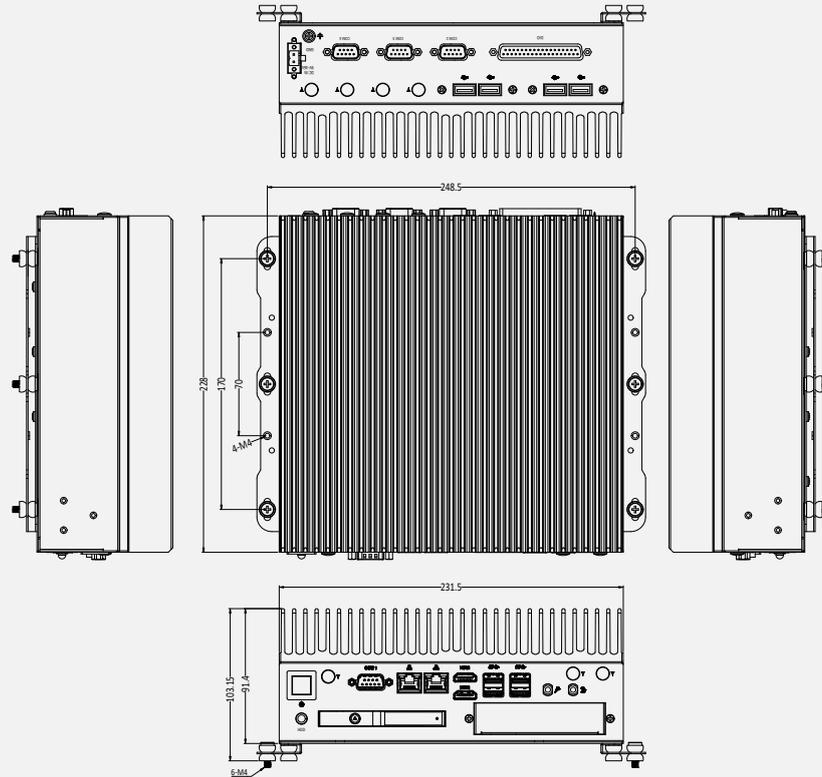

Viewing

